




Designed by Mikroelektronika
mikromedia 4 for TIVA Capacitive Schematic v1.01

mikromedia⁴

for TIVA CAPACITIVE




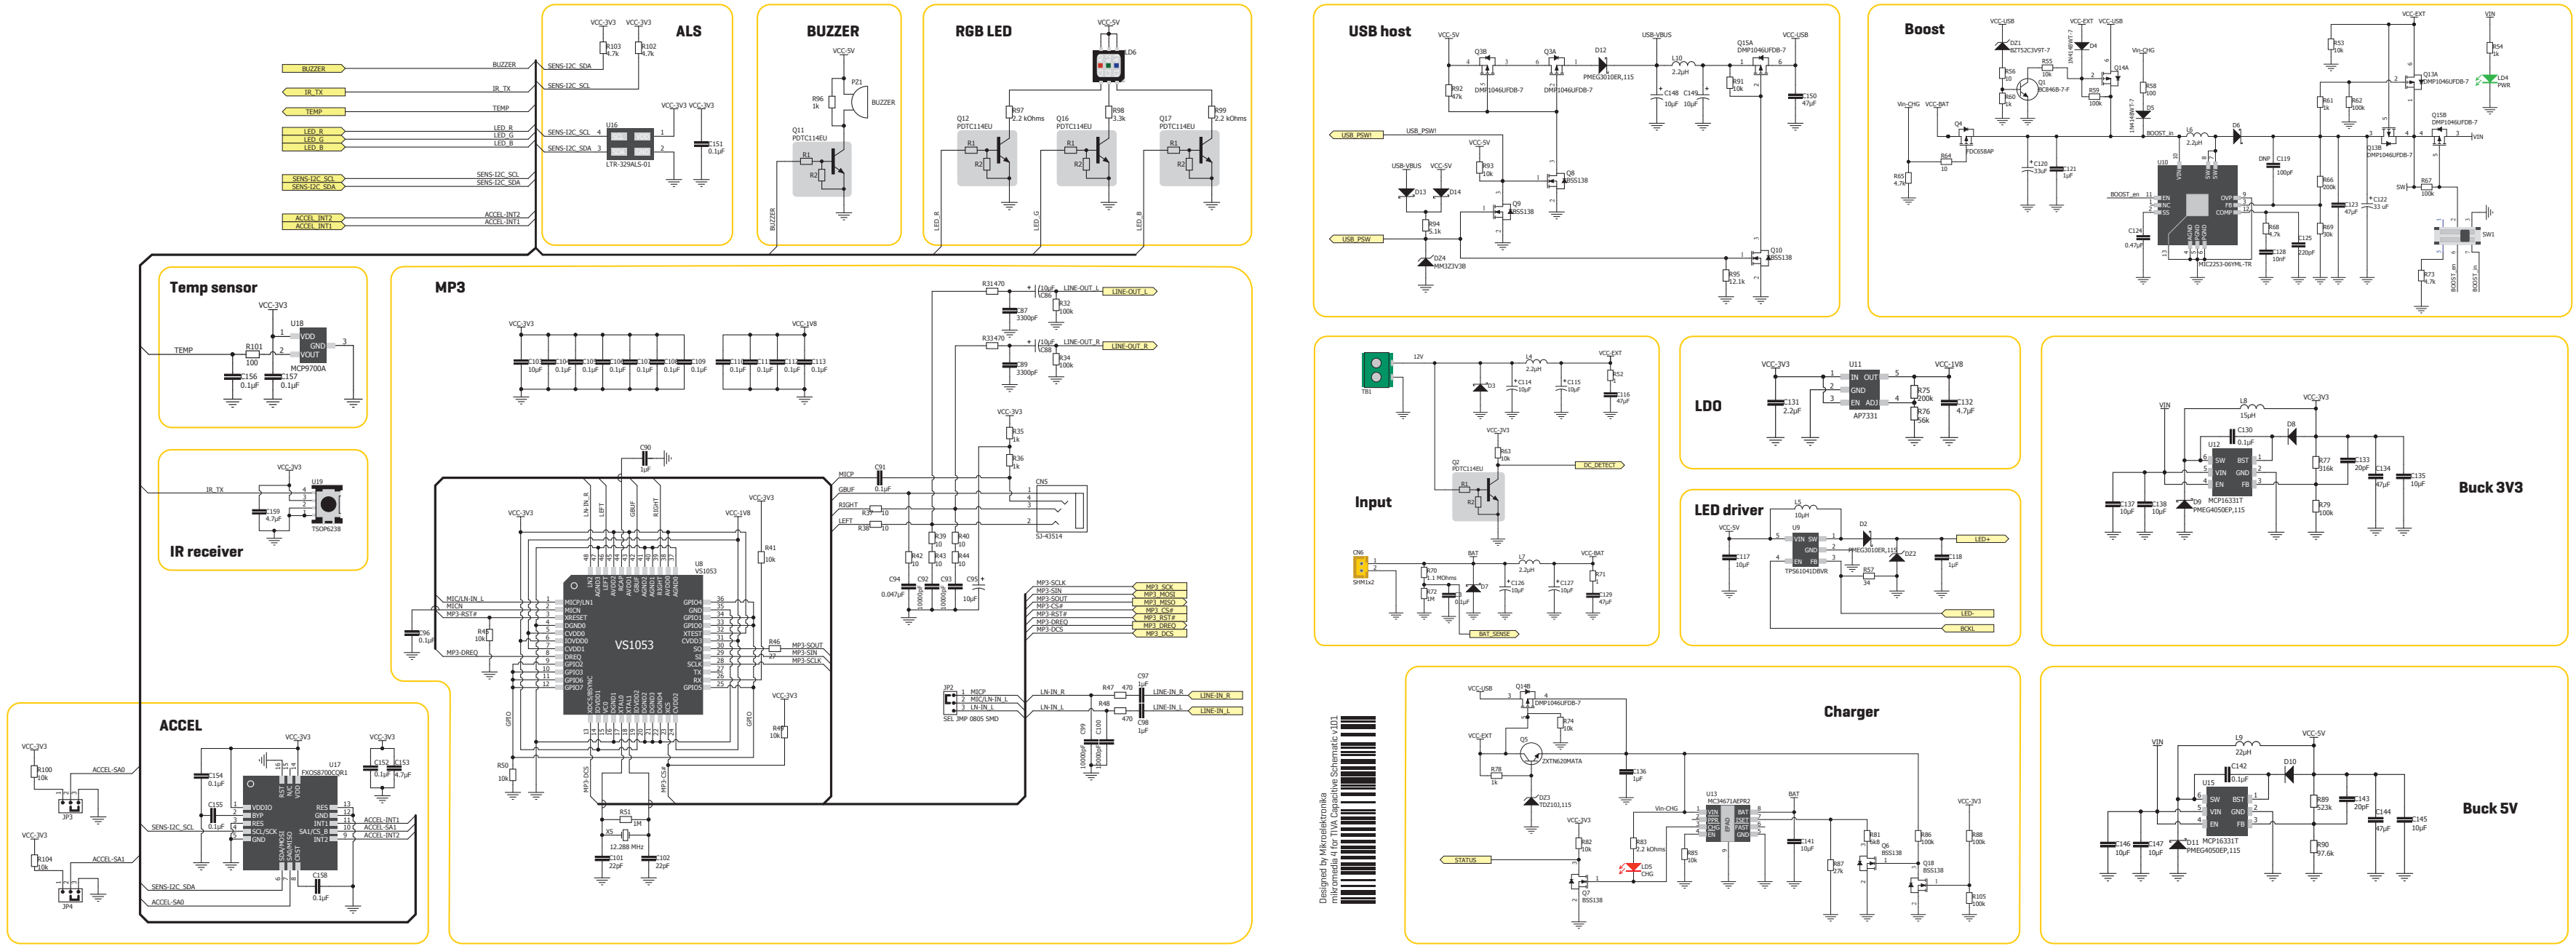


SCHEMATIC



Figure 10 shows the recommended decoupling capacitor values for the AD7715. The diagrams are as follows:

- VCC_CORE:** C58 (10nF), C59 (0.1μF), C60 (1μF), C61 (2.2μF).
- REF:** C62 (10nF), C63 (0.1μF).
- VCC_ADC:** C64 (10nF), C65 (0.1μF), C66 (1μF).
- VCC_3V3:** C67 (10nF), C68 (10nF), C69 (0.1μF), C70 (0.1μF), C71 (0.1μF), C72 (0.1μF), C73 (0.1μF), C74 (0.1μF), C75 (0.1μF), C76 (0.1μF), C77 (0.1μF), C78 (0.1μF), C79 (0.1μF).

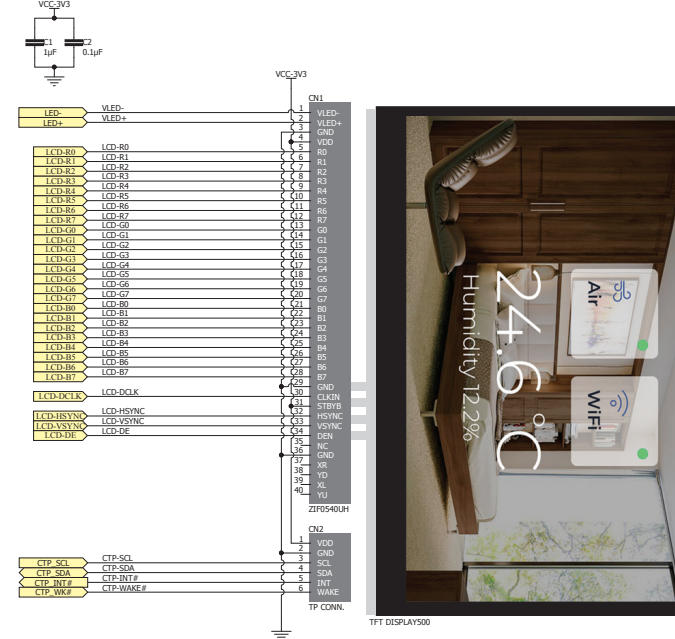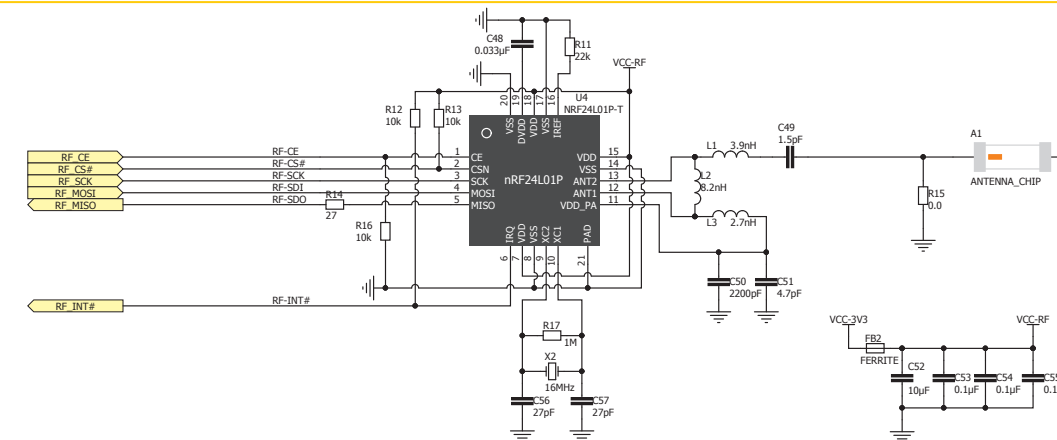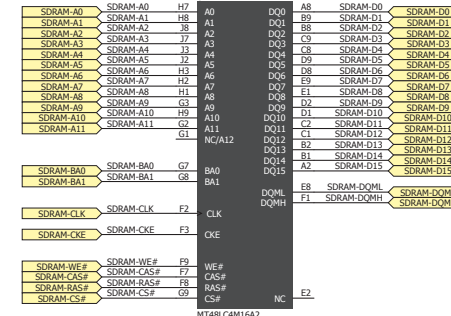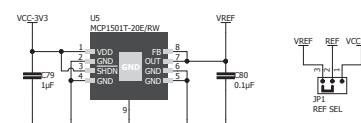

MikroElektronika assumes no responsibility or liability for any errors or inaccuracies that may appear in the present document. Specification and information contained in this schematic are subject to change at any time without notice. Copyright©2020 MikroElektronika. All rights reserved